

Product details:

Item No.: 844190

Model No.: F9

Technical data:

Input: 12V/1A

CCT: 3000K

CRI: 80Ra

Tools list:




1. Heat gun
2. Scissors
3. Tweezers
4. Needle-nose pliers
5. Locking pliers
6. Soldering iron

Instructions on how to remove the light source:

Note: Please operate following steps when the product is powered off.


Step1: Heat the top of the lamp holder with Heat gun, then remove the top lid with Locking pliers.

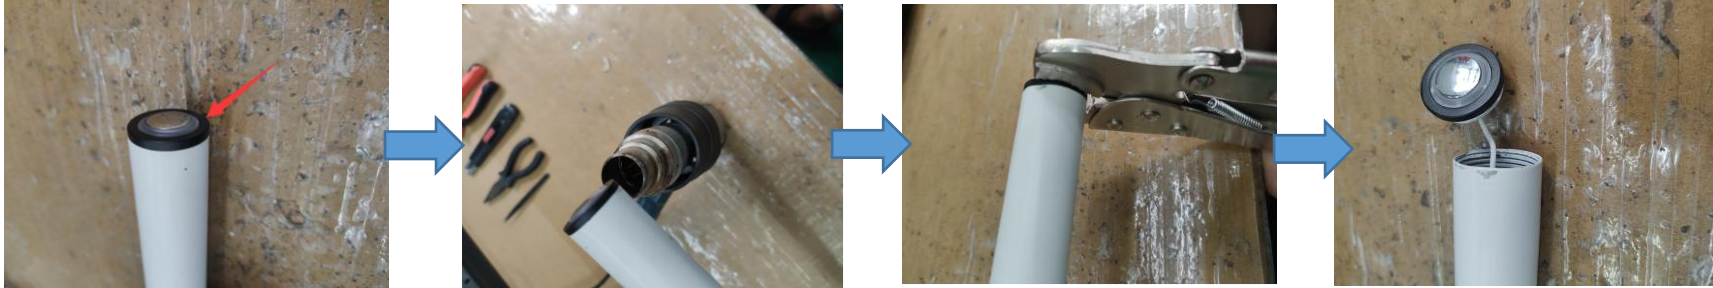

Step2: Hold the diffuser with Needle-nose pliers and pull it out




Step3: Use Tweezers to lift the LED strip up a bit and pull it out.

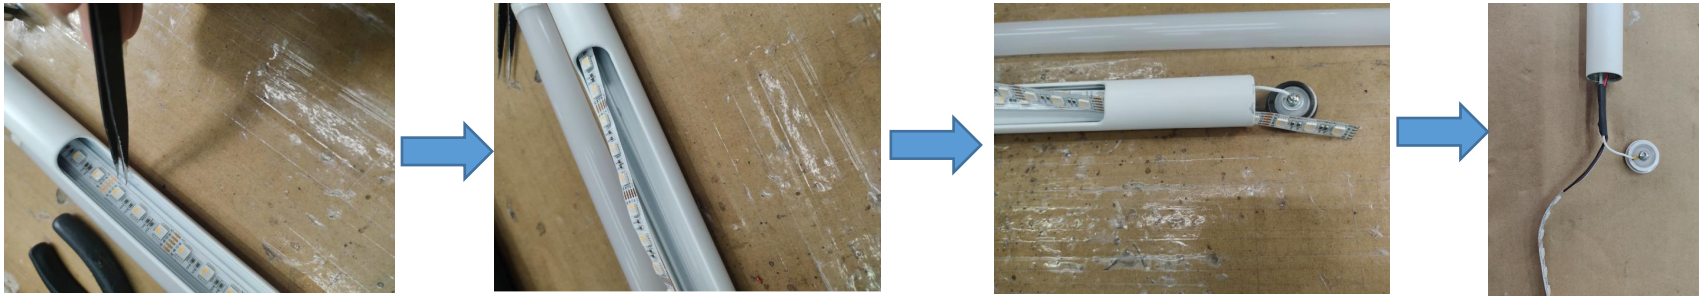

Step4: Remove the heat shrink tube with Scissors.



Step5: Use Soldering iron to remove the wires.

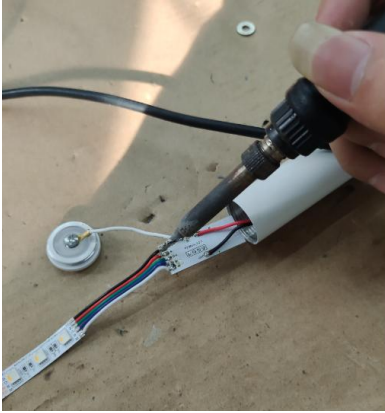

Step6: Now the light source was removed without being permanently damaged for verification purposes.

